



PURE PRO Series



CPRO 4



CPRO 6



CPRO 8




CPRO 8 SUB

User Manual/ Manual de uso




CPRO 4

CEILING SPEAKER

PURE PRO Series

**Dimensions**

Output selector

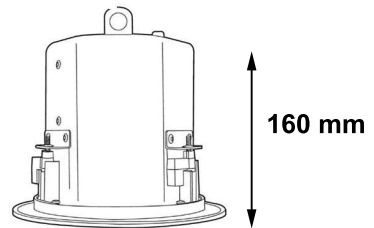

Power Taps (70V).....	1,25W / 2,5W / 5W / 10W /20W
Power Taps (100V).....	2.5W / 5W / 10W / 20W
Low Impedance position.....	8Ω(20W)
Sensitivity (1W/1m)	87 dB
Frequency Response	90Hz - 20kHz
Dimensions	Ø 204 x160 mm
Mounting Hole	Ø 180 mm
Material (front baffle)	ABS
Material (grille)	Iron
Weight	2,1 Kg

Specifications are subject to change without notice


CPRO 6

CEILING SPEAKER



PURE PRO Series




Dimensions



Output selector



267






Power Taps (70V).....	1,5W / 3,75W / 7,5W / 15W / 30W
Power Taps (100V).....	3,75W / 7,5W / 15W / 30W
Low Impedance position.....	8Ω (30W)
Sensitivity (1W/1m)	88 dB
Frequency Response	60Hz - 20kHz
Dimensions	Ø 267 x 162 mm
Mounting Hole	Ø 240 mm
Material (front baffle)	ABS
Material (grille)	Iron
Weight	2,7 Kg

Specifications are subject to change without notice

CPRO 8

CEILING SPEAKER

PURE PRO Series

**Dimensions**

Power Taps (100V)	10 W / 20W / 40W
Low Impedance position	8Ω (40W)
Sensitivity (1W/1m)	90 dB
Frequency Response	58Hz - 20kHz
Dimensions	Ø 281 x 110 mm
Mounting Hole	Ø 250 mm
Material (front baffle)	ABS
Material (grille)	Iron
Weight	3,1 Kg

Specifications are subject to change without notice




CPRO 8 SUB

CEILING SUBWOOFER

PURE PRO Series



Dimensions



Power Taps (100V).....	10 W / 20W / 40W
Low Impedance position.....	8Ω (160W continuous)
Sensitivity (1W/1m)	90 dB
Frequency Response	78Hz - 250Hz (+/-3dB)
Dimensions	Ø 281 x 110 mm
Mounting Hole	Ø 250 mm
Material (front baffle)	ABS
Material (grille)	Iron
Weight	3,1 Kg

Specifications are subject to change without notice


CPRO 4

ALTAVOZ DE TECHO




PURE PRO Series



Dimensiones



Selector de salida

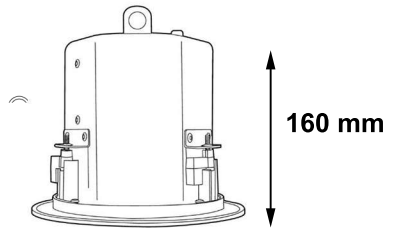


Posic. de potencia (70V).....	1,25W / 2,5W / 5W / 10W /20W
Posic. de potencia (100V).....	2.5W / 5W / 10W / 20W
impedancia.....	8Ω (20W)
Sensibilidad (1W/1m)	87 dB
Respuesta en Frecuencia	90Hz - 20kHz
Dimensiones	Ø 204 x160 mm
Dimensiones de montaje	Ø 180 mm
Material	ABS
Material (rejilla)	Hierro
Peso	2,1 Kg



Especificaciones sujetas a cambio sin previo aviso




Dimensiones



Selector de salida



267






Posic. de potencia (70V).....	1,5W / 3,75W / 7,5W / 15W / 30W
Posic. de potencia (100V).....	3,75W / 7,5W / 15W / 30W
Posición baja impedancia.....	8Ω (40W)
Sensibilidad (1W/1m)	88 dB
Respuesta en frecuencia	60Hz - 20kHz
Dimensiones	Ø 267 x 162 mm
Dimensiones de montaje	Ø 240 mm
Material	ABS
Material (rejilla)	Hierro
Peso	2,7 Kg

Especificaciones sujetas a cambio sin previo aviso

CPRO 8

ALTAVOCES DE TECHO

PURE PRO Series

**Dimensiones**




Posic. de potencia (100V).....	10 W / 20W / 40W
Posición baja impedancia.....	8Ω (40W)
Sensibilidad(1W/1m)	90 dB
Respuesta en frecuencia	58Hz - 20kHz
Dimensiones	Ø 281 x 110 mm
Dimensiones de montaje	Ø 250 mm
Material	ABS
Material (rejilla)	Hierro
Peso	3,1 Kg

Especificaciones sujetas a cambio sin previo aviso

CPRO 8 SUB

SUBWOOFER DE TECHO

PURE PRO Series

**Dimensiones**

Posic. de potencia (100V).....	10 W / 20W / 40W
Posición baja impedancia.....	8Ω (160W continuos)
Sensibilidad(1W/1m)	90 dB
Respuesta en frecuencia	78Hz - 250Hz (+/- 3dB)
Dimensiones	Ø 281 x 110 mm
Dimensiones de montaje	Ø 250 mm
Material	ABS
Material (rejilla)	Hierro
Peso	3,1 Kg

Especificaciones sujetas a cambio sin previo aviso



EQUIPSON, S.A.

Avda. El Saler, 14 - Pol. Ind. L'Alteró, 46460 - Silla (Valencia) Spain

Tel. +34 96 121 63 01 Fax + 34 96 120 02 42

www.workproaudio.com support@work.es