Model: SR860

CATALOG LINE DRAWING TEMPLATE

35.49 (902mm) 32.70" (830mm) 6.91" (176mm) MAX 2.72" (69mm) 22.58" (574mm) 1.25" (32mm) 65.83" (1672mm) MAX ymining 0.42" l 61.83" (1570mm) (11mm 77.09" (1958mm) 9.08 1.00" (231mm) 18.42" 57.83" (1469mm) (25mm (469mm) 32.50" (826mm) 53.83" (1367mm) 15.75" (400mm) 16.88' 28.34" (429mm) ا 49.83" 21.01" 20mm) Ø4.00" (1266mm) (534mm) 13.49" (343mm) MIN Ø ÷ 28.99' (736mm FRONT VIEW SIDE VIEW ADAPTOR DETAIL

1. All dimensions: Font = Arial Regular 5.36 pt (line space: 6.46 pt) Color = black

2. Captions: Font = Century Gothic/Bold 6.46 pt (line space: 8.20 pt) Color = black

3. Sub-captions: Font = Century Gothic/Bold 5.36 pt (line space: 6.46 pt) Color = black

4. Line drawings: Color = black Line weight = from .5 to 1 pt (visual call depending on drawing) All arrows must be the same style

1. All dimensions: Font = Arial Regular 8.84 pt mm color = black inch color = Pantone 201C (SMYK)

2. Captions: Font = Century Gothic/Bold 10.66 pt Color = black


PRODUCT SELL SHEET TEMPLATE

3. Sub-captions: Font = Century Gothic/Bold 8.84 pt Color = black

W: 4.7431" x H: 2.6944"

4. Line drawings: Color = black Line weight = from .5 to 1 pt (visual call depending on drawing) All arrows must be the same style

W: 7.8883" x H: 4.3737"

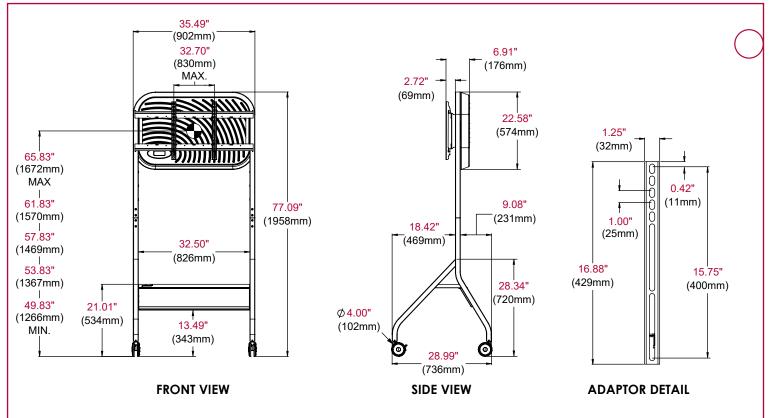

ARCHITECTS SPECIFICATIONS

The product shall be a Peerless-AV model **SR860** and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.