



Key Features

myViewBoard Digital Whiteboarding Solution | ViewBoard Cast Content
Sharing Software | Android 8.1 Oreo OS | 10-Point Multi-Touch |
Equipped With Wi-Fi, Bluetooth and RJ45



Product Description

The ViewSonic® IFP2410 ViewBoard® Mini is a 24"™ smart display that transforms podiums and lecterns into collaboration hubs for front-facing teaching. With integrated myViewBoard® digital whiteboarding software, ViewBoard Cast streaming software, and a 10-point touchscreen, the ViewBoard Mini makes content creation and sharing easier than ever before. Educators can manipulate and control content, files, images, and annotations on the ViewBoard Mini touchscreen, then share that content on a larger front-of-classroom display or projector. For dynamic lessons and interactive collaboration, multiple presenters can simultaneously draw, write, and annotate on the ViewBoard Mini as well – making it an ideal collaboration hub solution for classrooms, lecture halls, and auditoriums.

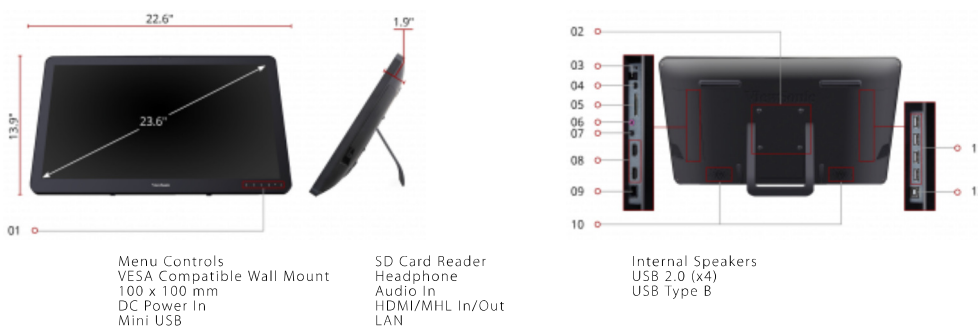

**24"
DISPLAY**

RESOLUTION

**10-Point
TOUCH INTERACTIVE**

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Select your preferred Country/Region: ▼

Display:

Display Size (in.):	24
Viewable Area (in.):	23.6
Light Source:	LED
Resolution:	1920 x 1080
Panel Type:	IPS
Aspect Ratio:	16:9
Static Contrast Ratio:	3,000:1
Backlight Life (Hours):	30,000
Brightness:	250 cd/m ²
Response Time (Typical GTG):	16ms
Viewing Angles:	178° horizontal, 178° vertical
Panel Surface:	3H Anti-glare, hard-coating

Networking:

Wifi:	802.11 b/g/n/ac (2.4GHz / 5GHz)
Bluetooth:	Bluetooth 4.0

Embedded Player:

OS:	8.1
CPU:	Rockchip® RK3288W Cortex-A17 Quad-Core
Memory:	2GB DDR3
Storage:	16GB eMMC
Interface:	OSD

Audio:

Microphone:	Built In, Echo cancelling
Internal Speakers:	2.5W (x2)

Connector:

HDMI 1.4(1), HDMI 1.4 Out(1), 3.5mm Audio Out(1), USB 2.0(4), USB 2.0 Type B(1), Ethernet LAN (RJ45)(1)

Power:

Voltage:	100-240 VAC
Consumption (max):	40W
Consumption (typical):	16W
Stand-by:	<2W

Operating Conditions:

Temperature:	32-95° F (0 - 35° C)
Humidity (non-condensing):	20-90%

Touch:

Touch Technology:	Capacitive
Touch Points:	10-Point Touch

Weight (imperial):

Net (lbs):	12.4
Gross (lbs):	16.7

Weight (metric):

Net (kg):	5.6
Gross (kg):	7.6

Dimensions (imperial) (WxHxD):

Packaging (in.):	25.3 x 17.1 x 4.9
Physical (in.):	22.6 x 13.9 x 1.9

Dimensions (metric) (WxHxD):

Packaging (mm):	643.0 x 435.0 x 140.0
Physical (mm):	572.9 x 351.8 x 47.0

Mount:

VESA Compatible:	100 x 100 mm
------------------	--------------

General:

Warranty: Three-year limited warranty on parts, labor and backlight
Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

PACKAGE CONTENTS: IFP2410, power adapter and cord, Quick Start Guide

Regulations: cTUVus, FCC-B(including ICES003), FCC-ID, CA IC

UPC: 766907003864

Accessories:

NMP660, VB-WKB-001

