

GET INFORMATION AND PRICING +1 480 664 8599



MODEL L-27i

FOR UP TO 48" TV

- Lift Extends 67.3 cm Downwards
- TV Maximum Screen Size: 48"
- TV Maximum Height: 64.8 cm
- Maximum Weight: 40.8 kg

Model L-27i packs an incredible combination of features into a compact and powerful system. Smooth motion, quiet operation and industry-leading reliability have made this lift the choice of homeowners and professionals around the world. Popular uses include lowering your TV from the ceiling, above built-in fireplaces and in outdoor patio enclosures.

- Industry-Leading Reliability
- Near Silent Operation
- Includes Mounting Kit for Your Ceiling Cover
- Popular for Bars and Outdoor Patios



All Nexus products are shipped in custom-made protective packaging, and they include everything you need to mount and operate them. The products are designed for easy assembly and simple instructions with photos are included.




GET INFORMATION AND PRICING +1 480 664 8599

MODEL L-27i

TECHNICAL SPECIFICATIONS

- 40.8 kg total lift capacity
- TV maximum screen size: 48"
- Travels 67.3 cm
- No exposed tracks, gears or scissors
- UL recognized
- Draws 3.5 Amps @ 110V and 1.75 Amps @ 220V at max thrust
- Speed 4.3 cm / sec. (only 15 sec. to fully extend)
- Quiet runs at just 45 dB
- Chain-driven mechanism
- Steel construction
- Your choice of RF remote or Control System Integration Kit (CSI Kit includes IR remote and contact closure interface)
- Exclusive Nexus 21 Safety Package included
- "Soft Start" and "Soft Stop" for smooth ride
- Power is Available in These Formats: USA, 110V / Europe, 230V / Japan, 100V Australia, 240V / UK, 230V

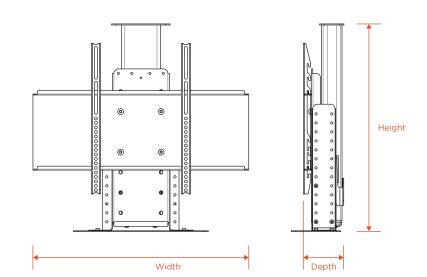

Height: 58.9 cm Width: 61 cm Depth: 11.4 cm from back wall to rear of TV

WHAT'S IN THE BOX

- Motorized lift column (the motorized unit is pre-assembled and ready to use)
- Heavy duty screen support with universal TV mounting plate
- Height adjustable top supports
- Lid plate with adjustable extensions and finger safety
- Base plate and upper back mounting bracket
- Control box with power cord
- Remote control and receiver (your choice of RF or CSI Kit*)
- Backup control switch
- Cord control wrap
- All hardware for assembly and mounting
- Full assembly instructions with photos



CONTROL OPTIONS

Your choice of RF remote or Control System Integration Kit (CSI Kit*). Wired button pad included with both.



*CSI Kit includes IR remote and contact closure interface

MOUNTING BRACKET FOR CEILING COVER

Attach any type of cover to the lid plate to seamlessly hide the lift within the ceiling or cabinet. Spring loaded lid stabilization hardware included.

